

NYS-CURE® CG-9011 Ag/Cu FIP Conductive Gasket (Fast Cure)

NYS-CURE® CG-9011, a Nystein proprietary product, is a room temperature "Fast Cure" Silver/Copper FIP conductive gasket. With guaranteed conductivity and flow rate, it features shortened curing time by adjusting ingredients mixing ratio. The product is ideal mass production pick.

Featured low hardness, good elasticity and low compression set, NYS-CURE® CG-9011 has good adhesion strength on metal and plastic surfaces. The product can be applied to optical transceivers, telecommunication base stations, radar equipment, handheld devices and consumer electronics.




SPECIFICATIONS:

Typical Performance	NYS-CURE®CG-9011	Unit	Test Method
Color	Grey	-	Visual
Resin System	Silicone	-	-
Filler	Ag/Cu	-	-
Volume Resistivity	0.004	Ohm-cm	MIL-DTL-83528C
Shielding Effectiveness	90	dB (200M-18G)	MIL-DTL-83528C
Hardness	55	Shore A	ASTM D2240
Density	3.2	g/cm ³	ASTM D792
Compression Set	30	%	ASTM D395
Adhesion Strength	10	N/cm	QA-WI-054
Tensile Strength	130	PSI	ASTM D412
Elongation at Break	150	%	ASTM D412
Working Temperature	-50~+125	°C	ASTM D1329
Flammability Rating	V-0	-	UL 94(with Al plate)
Curing Mechanism	Moisture	-	-
Curing Condition	25	°C	-
Curing Time	12	H	-
Storage Condition	-30°C~-10°C, 3 Months	-	-

FEATURES & BENEFITS:

- Fast curing and formation.
- Excellent EMI shielding effectiveness, over 90dB.
- Room temperature curing to avoid negative impact on enclosure and other component(s).
- Savings on raw material, assembly labors.
- Savings on expensive tooling costs and support fast prototyping.

COMPRESSION-DEFLECTION CURVE:

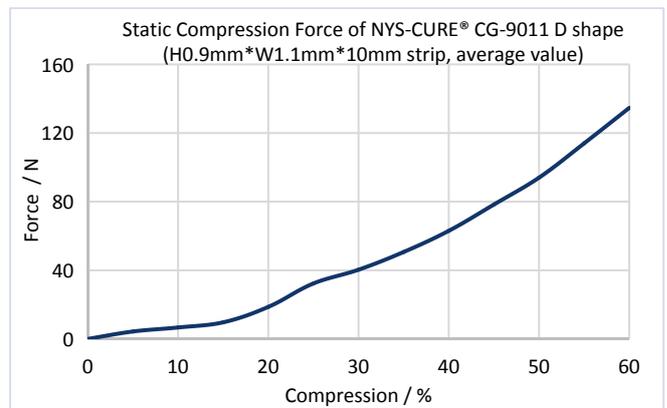

Declare:

The recommendation and data furnished by Nystein China is based on our experiment and experience to date. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Nystein China shall not be liable for their usage and processing. The technology data sheet is subject to change without notice. The final interpretation right of the contents of this specification belongs to Nystein China.